

TFPV SERIES


leader in secondary demolition



Enjoy your choice:

TocDem TFPV Series, manufactured in HARDOX, is specifically designed to work on the ground, making it ideal for all secondary demolition needs. Perfect for recycling and crushing, the TFPV series is perfect for recycling and pulverisation work.

- HARDOX structure;
- reversed cylinder to protect the rod from accidental hits;
- interchangeable teeth;
- innovative "PRV" (Pressure Relief Valve) to protect the pulveriser from high pressure;
- productivity is maximized thanks to a regenerative installation within the machine that allows movements and maximises strength;
- interchangeable blades.

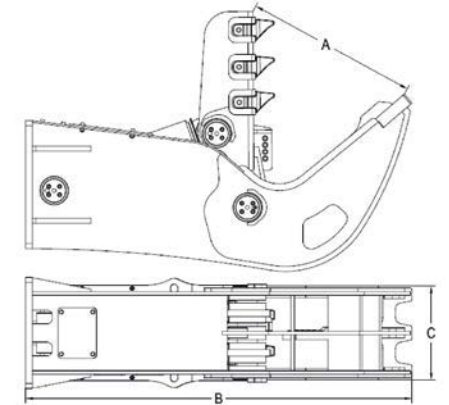

TFPV SERIES

PULVERISERS

TFPV MODEL	U.M.	TFPV 6	TFPV 12	TFPV 17	TFPV 20.1	TFPV 30.1	TFPV 45	TFPV 60	TFPV 100
OPENING (A)	mm	510	700	815	850	1,040	1,080	1,130	1,800
	in.	20	27	32	34	41	42.5	44.5	71
LENGTH (B)	mm	1,300	1,920	2,080	2,300	2,660	2,700	2,800	3,200
	in.	51	76	82	91	105	106	110	126
WIDTH (C)	mm	330	400	460	550	560	600	760	950
	in.	13	15.75	18.1	21.65	22	23.6	29.9	37.40
EXCAVATOR WEIGHT	Ton	6/7	12/17	16/20	21/29	30/45	40/60	60/80	80/130
	lbs	12,000/14,000	24,000/34,000	36,000/40,000	42,000/58,000	60,000/90,000	80,000/120,000	120,000/160,000	160,000/260,000
EQUIPMENT WEIGHT	Kg	500	1,100	1,550	2,050	2,800	4,500	5,400	10,400
	lbs	1,102	2,245	3,417	4,520	6,173	9,921	10,803	22,928
OIL PRESSURE	Bar	250	310	340	340	340	340	340	340
	psi	3,625	4,495	4,930	4,930	4,930	4,930	4,930	4,930
OIL CAPACITY	L/min	80/100	180/220	200/240	220/280	280/330	300/350	400/500	500/600
	gal/min	21/26	47/58	52/63	58/73	79/87	79/92	106/132	132/158