



Unique Valve Design

Easy maintenance. It lessens pressure fluctuation, and therefore any potential damage to the machine driving it.

Accumulator

The accumulator compensates for and any high pressure surges in the hydraulic circuit.

Fully Sealed Enclosure

High quality heat treated fully enclosed welded body to reduce noise & increase lifespan.

Tool Bush

quality components maintenance is both quick

Ease Of

Maintenance

With fewer components, ample space & high

Piston Stroke


The piston is manufactured from heat treated high grade steel and has a long stroke which minimises recoil.

Front Head

The front head prevents the whole Hammer taking each blow. The body is also hardened & heat treated ensuring a longer life.

High Quality Work Tool

Manufactured from high grade steel & heat treated for performance.
Moil point & chisels are available.

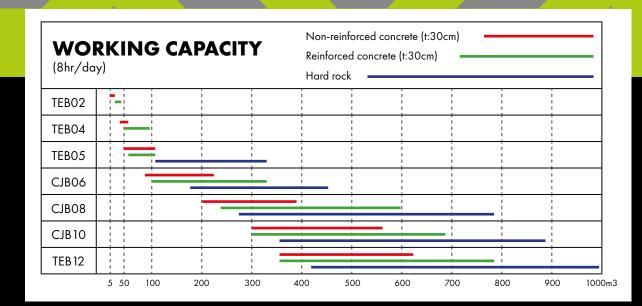



GETS THE JOB DONE! All TocDem Attachments Hydraulic Hammers are designed using the latest technology, advances in engineering & to the very highest specification. These units are able to easily cope with the demands of any Demolition, Mining, Construction

or Utility site.



Every TocDem Hammer is supplied with:

- 2 Points / Chisels
- Head Bracket / Ears / Hanger
- 2 Head Bracket Pins
- 2 Hydraulic Hoses & Couplings
- Tool Box
- Gas Bottle
- Instruction Manual
- Parts Manual



Excellent BPM Impact Rate – Increasing efficiency

TocDem Hammers give a severe and deep impact, coupled with a fast and efficient BPM "Blows Per Minute". When put up against the competition the TocDem Hammer outperforms by virtue of its unique design & therefore saves you time and money.

Energy Class

TocDem Hammers range from 150 ft lb / 203 Joules through to a powerful and substantial 10,000 ft lb / 13557 Joules.


Quality Control, Research & Development

As a service business as well as a manufacturer TocDem Attachments appreciate the need for quality control. A number of rigorous pre delivery inspections and test are carried out before any Hammer is supplied. As well as this TocDem Attachments are always evaluating current technology & latest techniques in an effort to constantly improve the product range.

Technical, Customer & After Sales Support

A key feature of TocDem Attachments is always "standing behind" and supporting any product we sell. With this in mind we always stock a full range of all spares for TocDem Hammers available for immediate delivery and are always available to give technical advice & support on the range.

| Hydraulic Breaker | | | | | | | | | | | |
|--------------------|-------------|-------------|-------------|-------------|--------------|--------------|---------------|---------------|---------------|---------------|----------------|
| Model Number | | TEB 075 | TEB 00 | TEB 020 | TEB 02 | TEB 04 | TEB 05 | TEB 06 | TEB 08 | TEB 10 | TEB 12 |
| Suitable Excavator | tonne | 0.8 - 2.0 | 0.8 - 2.0 | 2.0 - 4.0 | 2.0 - 4.0 | 4.0 - 7.0 | 7.0 - 11.0 | 11.0 - 18.0 | 19.0 - 28.0 | 28.0 - 40.0 | 40.0 - 55.0 |
| Suitable Excavator | lbs | 1760 - 4400 | 1760 - 4400 | 4400 - 8800 | 4400 - 8800 | 8800 - 15400 | 15400 - 24200 | 24200 - 39600 | 41800 - 61600 | 61600 - 88000 | 88000 - 121000 |
| Chisel Diameter | mm / inches | 35 / 1.50 | 40 / 1.75 | 45 / 1.95 | 53 / 2.08 | 75 / 2.95 | 85 / 3.34 | 100 / 3.93 | 140 / 5.50 | 155 / 6.10 | 175 / 6.88 |
| Total Weight | kg | 80 | 115 | 115 | 180 | 421 | 577 | 973 | 1989 | 2950 | 4210 |
| Total Weight | lbs | 176 | 253 | 253 | 396 | 926 | 1269 | 2140 | 4375 | 6490 | 9262 |
| Overall Length | mm / inches | 983 / 38.55 | 983 / 38.55 | 983 / 38.55 | 1100 / 43.14 | 1700 / 66.92 | 1920 / 75.59 | 2260 / 88.97 | 2810 / 110.62 | 3152 / 123.61 | 3400 / 133.85 |
| Operating Pressure | kg/cm² | 90 - 120 | 90 - 120 | 90 - 120 | 90 - 120 | 110 - 160 | 120 - 170 | 150 - 170 | 160 - 180 | 160 - 180 | 160 - 180 |
| Oil Flow | l/min | 15 - 25 | 15 - 25 | 15 - 25 | 15 - 25 | 30 - 45 | 45 - 85 | 80 - 120 | 130 - 170 | 170 - 220 | 210 - 290 |
| Impact Rate | BPM | 800 - 1400 | 800 - 1400 | 800 - 1400 | 700 - 1200 | 500 - 800 | 400 - 700 | 400 - 700 | 400 - 600 | 250 - 400 | 200 - 350 |
| Energy Class | ft lb | 150 | 150 | 650 | 650 | 1000 | 1500 | 4000 | 6000 | 8000 | 10000 |
| Hose Diameter | inch | 1/2″ | 1/2″ | 1/2″ | 1/2″ | 1/2" | 1/2" | 3/4" | 1″ | 1" | 1.25″ |

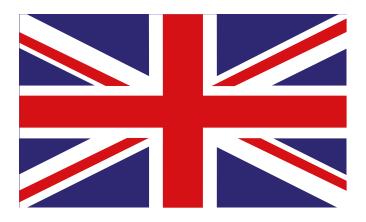

Back British Business





